



# Ludlow, Vermont

*A Better Place To Live, Work & Play*

## REQUEST FOR PROPOSAL

**FROM: Village of Ludlow**

**ATTENTION: Scott Murphy, Municipal Manager**

**DATE: July 22, 2022**

**The Village of Ludlow Vermont is seeking BIDS/PROPOSALS from qualified contractors for the following:**

### **RELOCATE HIGH SCHOOL SEWER LINE PROJECT**

Please see attached specifications and map.

**Sealed bids marked “Relocate High School Sewer Line Project” are due in the Municipal Office on Wednesday, August 17, 2022 by 10:00 am.** Emailed bids should be sent to Scott Murphy at [tmanager@tds.net](mailto:tmanager@tds.net). Bids will be opened publicly at 10:00 am in the Howard Barton, Jr. Conference Room and may possibly be awarded at the Village Board of Trustees next meeting. Project is to be completed by October 28, 2022.

The Village of Ludlow reserves the right to reject any or all proposals. This solicitation in no way obligates the Village of Ludlow to award a contract.

Certificate of Insurance is required with the bid proposal.

Contractors interested in bidding on the Relocation of the High School Sewer Line Project should contact Scott Murphy at (802) 228-2841, Chief Operator Joe Gaudiana at 802-228-8431, or Highway Foreman Ron Tarbell at (802) 770-9566.

Please submit proposals to:

Village of Ludlow  
P.O. Box 359  
Ludlow, VT 05149  
Attn: Relocation of High School Sewer Line Project


## **Relocate High School Sewer Line Project**

- Core and boot for 8" SDR 35 in Manhole MA1137.
- Furnish and install approx. 160' of SDR 35 sewer main.
- Install 4" Manhole where new main intersects service.
- Abandon flush tank in sidewalk, plug old clay line, and fill in flush tank with flowable fill.
- Patch pave according to Town specs (see road foreman).
- Repair Community Center service line @ manhole MA1137.
- Replace storm drain @ corner of high school drive.

### **Important for Contractors:**

Contractor must provide traffic control & proper sign packages, if needed in roadway.  
Contractor should avoid concrete sidewalk.

Project to be completed by October 28, 2022.

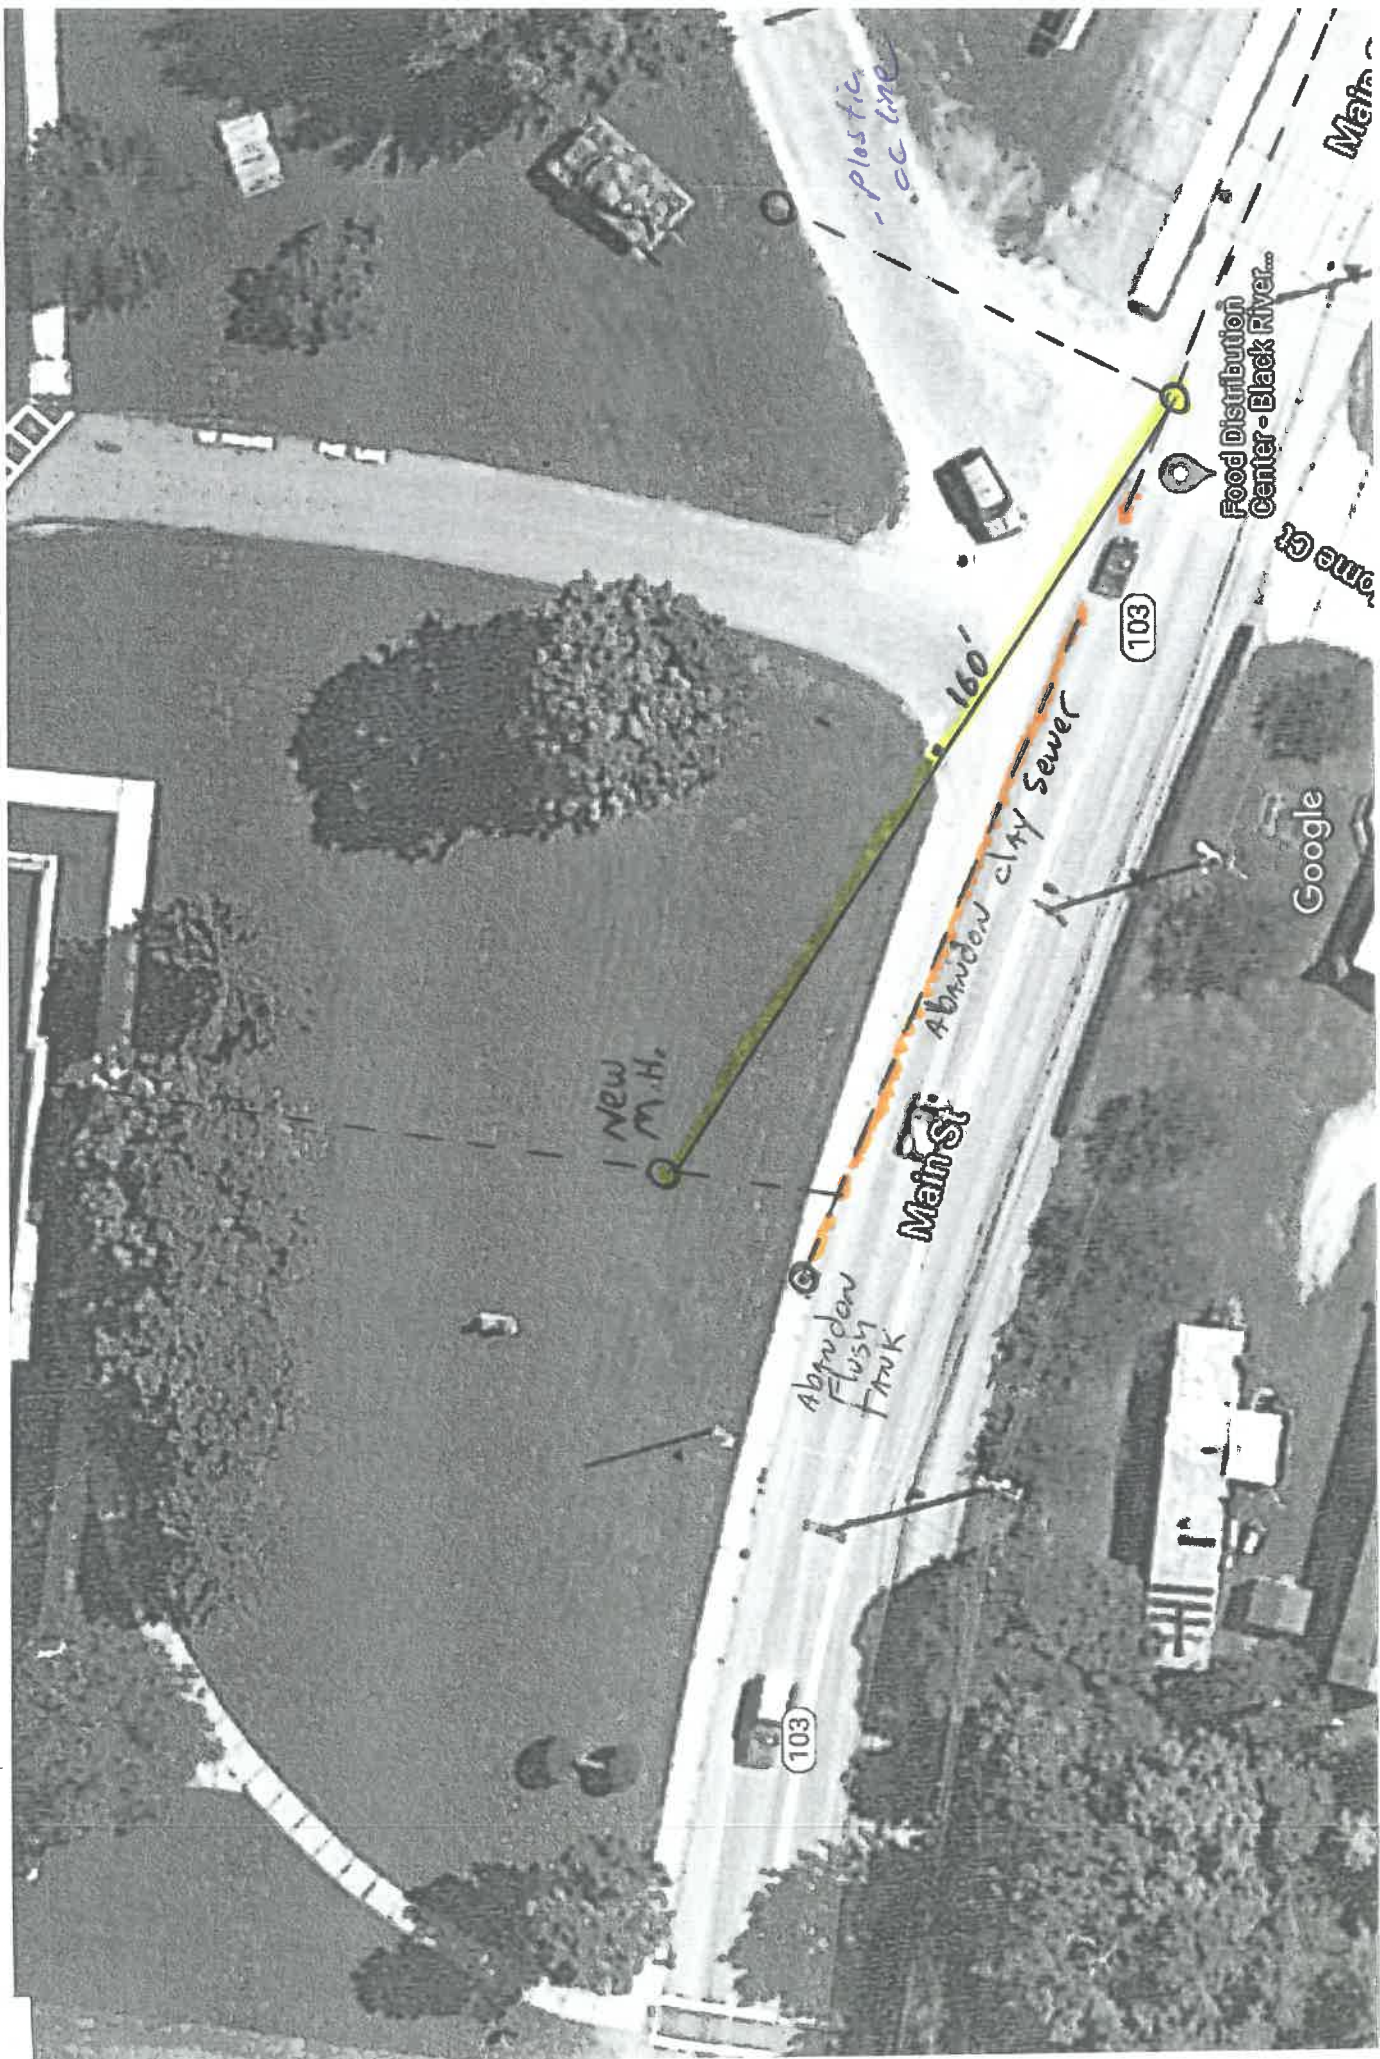

proposed sewer

existing sewer